

64 Way DIN 41612 Connector List			
From: 611S Mother board			
To: 82E210 Stereo dynamics side chain			
No	Row A	No	Row C
1	Compress LED 3dB	1	Expand LED 3dB
2	Compress LED 6dB	2	Expand LED 6dB
3	Compress LED 10dB	3	Expand LED 10dB
4	Compress LED 14dB	4	Expand LED 14dB
5	Compress LED 20dB	5	Expand LED 20dB
6	Not Used	6	Expand range CW
7	-18V	7	-18V
8	0V	8	0V
9	+11 V	9	+11V
10	+18V	10	+18V
11	Spare	11	Expand release
12	Audio L in	12	Attack switch common
13	Audio R in	13	Fast attack
14	Spare	14	Short attack
15	Output	15	Expand/gate switch common
16	Spare	16	Expand
17	Overload LED L	17	Gate
18	Overload LED R	18	Expand threshold
19	Overload bus L+	19	Expand threshold
20	Overload bus L-	20	Compress release
21	Overload bus R+	21	Attack sw common
22	Overload bus R-	22	Fast attack
23	Spare	23	Slow attack
24	Spare	24	Compress threshold wiper
25	Spare	25	Compress threshold -12V
26	Spare	26	Compress threshold (makeup)
27	Spare	27	Compress ratio (+12V)
28	Spare	28	Compress ratio (offset)
29	Spare	29	Compress ratio R
30	Spare	30	Compress ratio R
31	Spare	31	Compress ratio L
32	Spare	32	Compress ratio L

T82210.50


64 Way DIN 41612 Connector List

From: 611S Mother board

To: 82E210 Stereo dynamics side chain

No	Row A	No	Row C
1	Compress LED 3dB	1	Expand LED 3dB
2	Compress LED 6dB	2	Expand LED 6dB
3	Compress LED 10dB	3	Expand LED 10dB
4	Compress LED 14dB	4	Expand LED 14dB
5	Compress LED 20dB	5	Expand LED 20dB
6	Not Used	6	Expand range CW
7	-18V	7	-18V
8	0V	8	0V
9	+11 V	9	+11V
10	+18V	10	+18V
11	Spare	11	Expand release
12	Audio L in	12	Attack switch common
13	Audio R in	13	Fast attack
14	Spare	14	Short attack
15	Output	15	Expand/gate switch common
16	Spare	16	Expand
17	Overload LED L	17	Gate
18	Overload LED R	18	Expand threshold
19	Overload bus L+	19	Expand threshold
20	Overload bus L-	20	Compress release
21	Overload bus R+	21	Attack sw common
22	Overload bus R-	22	Fast attack
23	Spare	23	Slow attack
24	Spare	24	Compress threshold wiper
25	Spare	25	Compress threshold -12V
26	Spare	26	Compress threshold (makeup)
27	Spare	27	Compress ratio (+12V)
28	Spare	28	Compress ratio (offset)
29	Spare	29	Compress ratio R
30	Spare	30	Compress ratio R
31	Spare	31	Compress ratio L
32	Spare	32	Compress ratio L

T82210.50

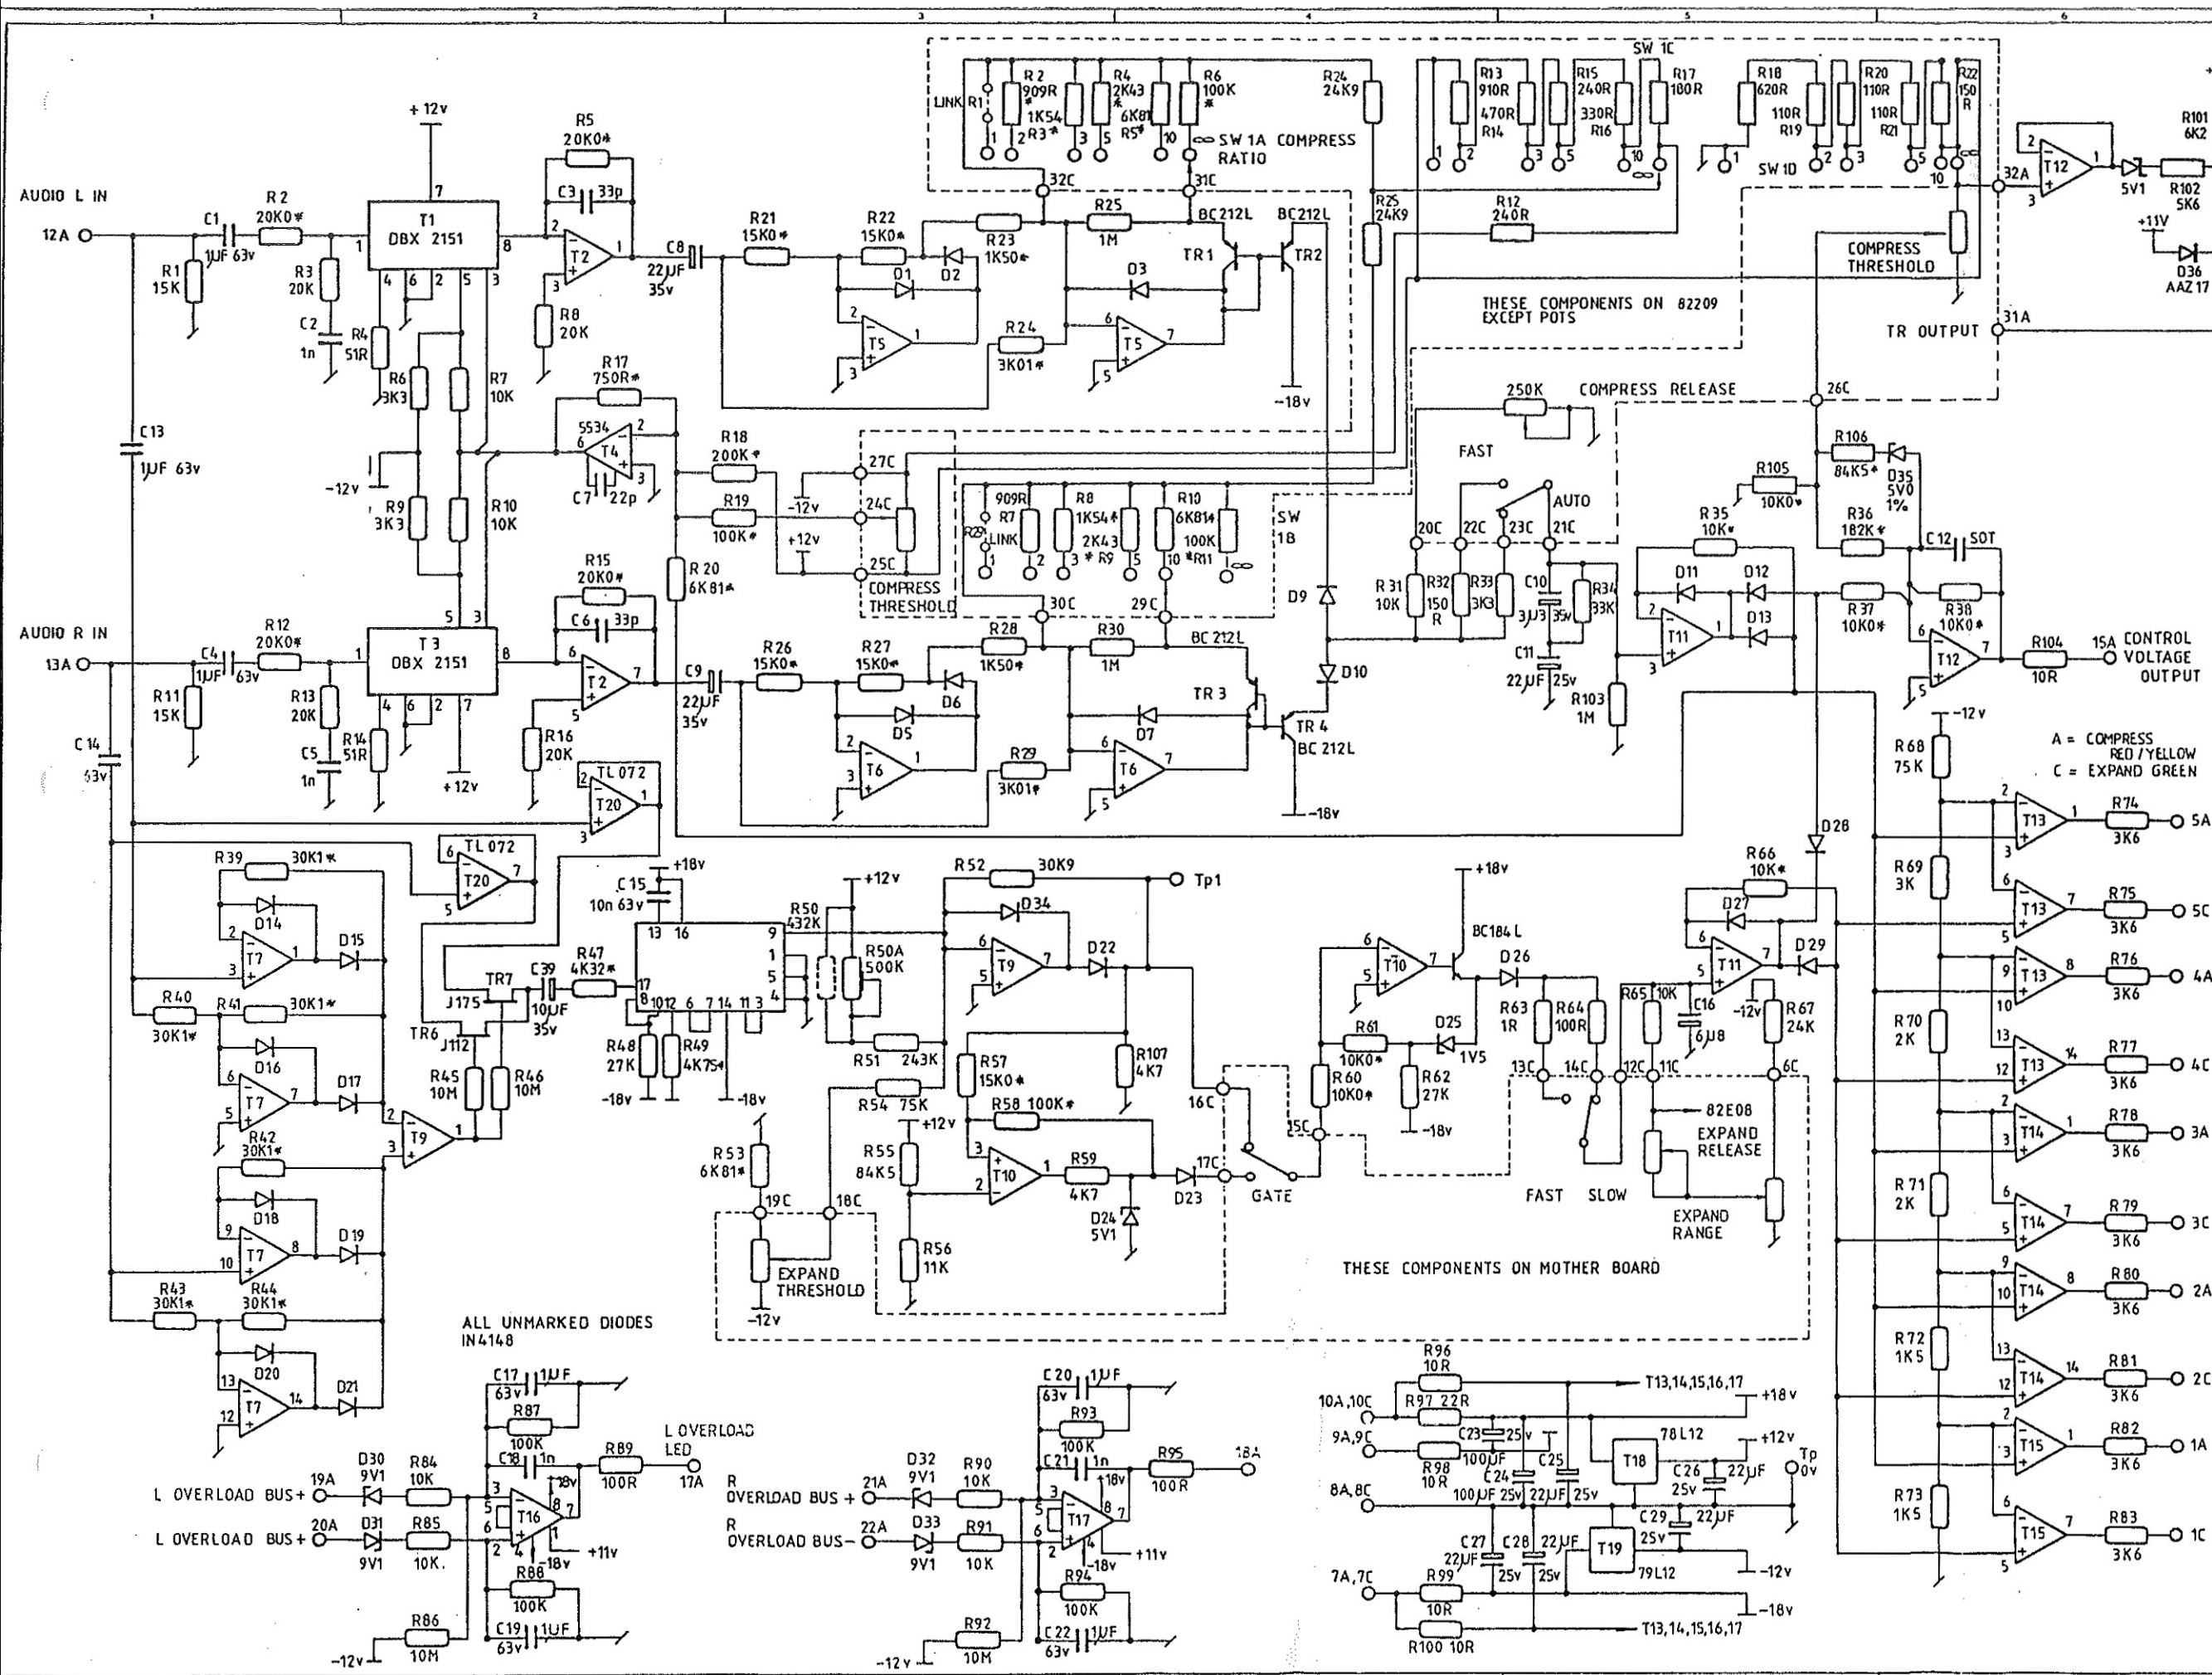

Copyright © SSL All rights reserved. This document may not be reproduced in any form without the written permission of SSL			
Rev	Issue	Chkd	Details
P	a	7-84	PROTOTYPE
1	a	1-85	R101, 102, 103 ADDED O/LOAD DETECTOR ALTERED
	2	a	4-85 R50, S1 CHANGED
2	b	1-85	REDRAWN V.B.
3	a	1-85 7-85	R62, 67 CHANGED 4-85
3	b	7-85	CIRCUIT AS INTENDED R24, 29 MOVED THRESHOLD AND MAKE- UP CHANGED
4	a	7-85	R74 TO R83 VALUE NOW 3K6
5	a	7-85	R50, S0A, S1 VALUE'S CHANGED
6	a	8-85	D35 NOW 5V0 1% R105 NOW 10K0* 0-5%
7	a	DM Nov85	T19 WAS 78L1 NOW 79L12
8	a	DCM Aug86	R101 6K2 WAS 10K R102 & D36 ADDED
8	b	II. July 87	PN NOS ADDED TO T2, T4-6, T11-15 & T20. R1-25 NAMED. 'A' & 'C' NOTE ADDED. NOTE ON COMPONENTS CHANGED. LINKS R1 & R29 ADDED.
8	c	BC Oct 87	R18-22 VALUES AMENDED STEFF
Title CF 82E210 STEREO DYNAMICS SIDE CHAIN			
Drg. No. T82210-70			
Solid State Logic			
2-19			

Rev	Issue	Chgd	Details
P	a	784	PROTOTYPE
1	a	1-85	R101, 102, 103 ADDED O/LOAD DETECTOR ALTERED
2	a	4-85	R50, S1 CHANGED
2	b	1-85	REDRAWN V.B.
3	a	7-85	R62, 67 CHANGED 4-85
3	b	7-85	CIRCUIT AS INTENDED R24, 29 MOVED THRESHOLD AND MAKE UP CHANGED
4	a	7-85	R74 TO R83 VALUE NOW 3K6
5	a	7-85	R50, S0A, S1 VALUES CHANGED
6	a	7-85	O35 NOW 5V0 1% R105 NOW 10K0 0-5%
7	a	Nov 85	T19 WAS 78L1 NOW 79L12
8	a	Dec 85	DCM R101 & R2 WAS 10K R102 & O36 ADDED
8	b	July 87	PH 1MS ADDED TO T2, T4 - 6, T11 - 15 & T20. R1 - 25 NAMED. 'A' & 'C' NOTE ADDED. NOTE ON COMPONENTS CHANGED. T1WS R1 & R 2% ADDED
8	c	Oct 87	R18-22 VALUES AMENDED STEFF